

AVU-8/2EC

Home | Security | Processing | Distributors/Amplifiers

AVU-8/2EC

Video Switcher 8 Inputs,

2 Outputs in Desktop Housing, 230VAC

Art-Nr. 76405



Main Features

8 Camera Inputs

2 Outputs (A and B)

Outputs Selectable as Spot or Sequence

Vertical Interval Switching

Selectable Dwell Time

Programmable Bypass Function

Supply Voltage: 15VAC 50/60Hz

Colour: Pantone Cool Gray 1C

Specifications

Video inputs	8x 1 Vp-p, (C)VBS, 75 ohms, BNC
Video outputs	2x 1Vp-p, (C)VBS, 75ohms BNC (A and B selectable as spot or sequence outputs)
Video signal bandwidth	10MHz +/-3db
Bypass function	Manual programmable
Event Actions	Available in line-locked systems (cameras and switcher)
Signal-to-noise ratio	60db
Temperature range	0°C ~+35°C
Dwell time	1 ~120sec., adjustable for output A und B
Cross talk	56db at 4.5MHz
Supply voltage	15VAC, 50/60Hz
Power consumption	approx. 4.5watts
Housing	Steel metal
Colour	Pantone Cool Gray 1C
Dimensions (HxWxD)	see drawing

AVU-8/2EC

(Continuation Specifications)

Weight	1.5kg (with PSU)
Parts supplied	PSU 230VAC/50Hz

AVU-8/2EC


Product information

*) Power supply unit 230 VAC/15 VAC included

AVU-8/2EC

Home | Security | Processing | Distributors/Amplifiers

Technical drawing

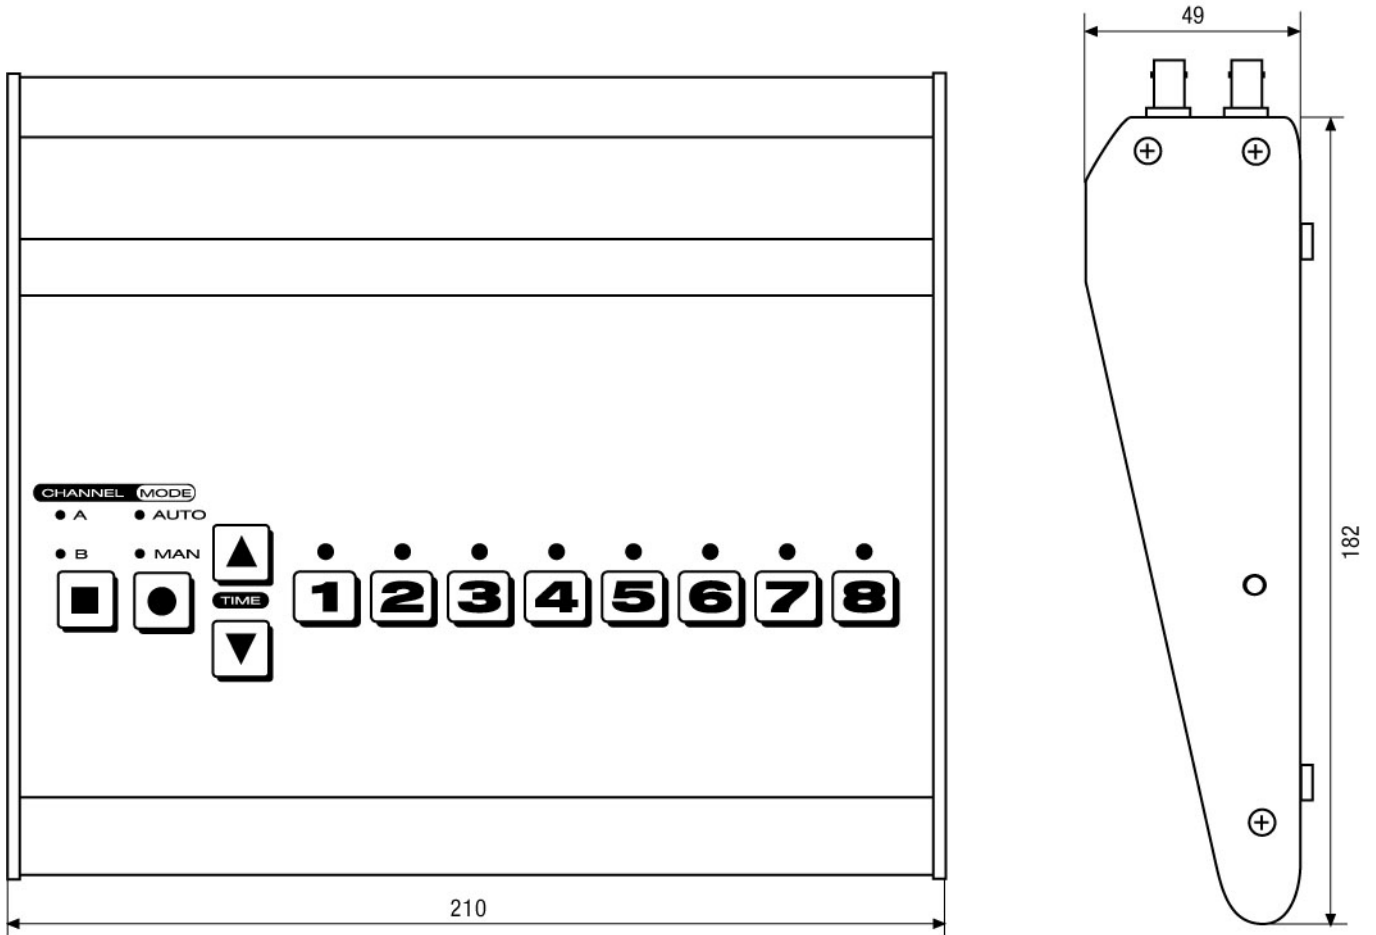

Maße/Dimensions: mm

SLD Security & Communications
The Old Forge, Ockham Lane, Ockham, Surrey GU236PH England
Phone +44.1483225633 · Fax +44.1483225634
sales@sld.co.uk · www.sld.co.uk

